


SERIE / MODEL EMC-N □□□  
CODICE / CODE 12.01.□□□.01

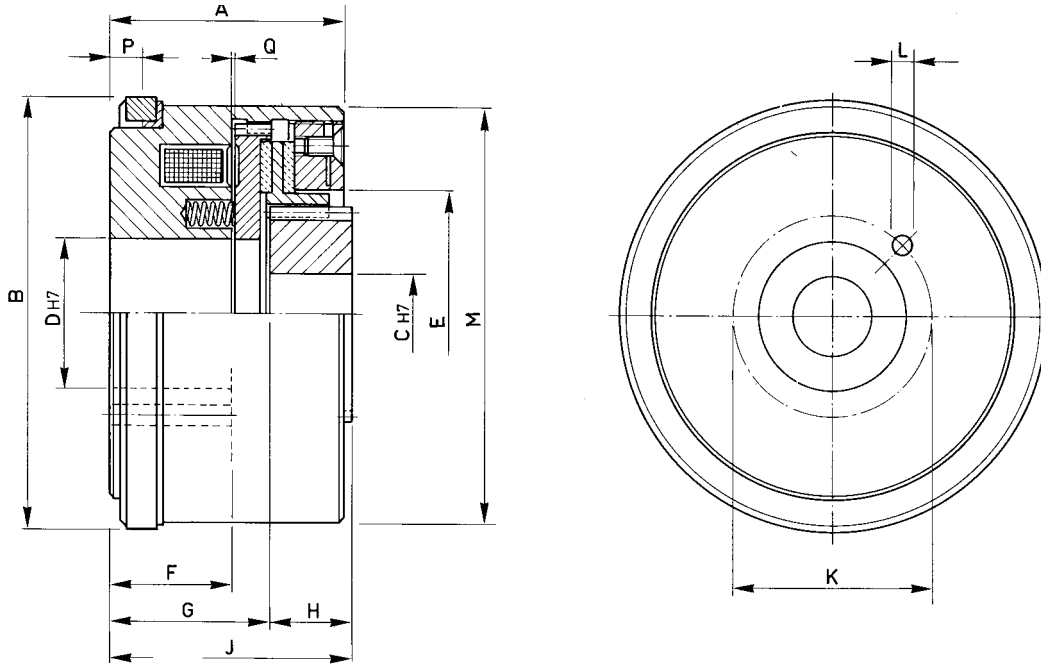

| □□□ | Momenti<br>Torques<br>Ms (Nm) | Tempi inser.<br>Build up time<br>ms | Tempi disin.<br>Decay time<br>ms | WATT |      | Peso<br>Weight<br>kg |
|-----|-------------------------------|-------------------------------------|----------------------------------|------|------|----------------------|
|     |                               |                                     |                                  | 20°  | 120° |                      |
| 114 | 25                            | 115                                 | 38                               | 55   | 40   | 4,3                  |
| 140 | 50                            | 145                                 | 42                               | 64   | 46   | 6                    |
| 166 | 100                           | 165                                 | 54                               | 78   | 56   | 9                    |
| 195 | 150                           | 205                                 | 70                               | 90   | 70   | 14                   |

| □□□ | A  | B   | C    |     | D  | E   | F  | G  | H  | J  | K   | L      | M   | P  | Q   |
|-----|----|-----|------|-----|----|-----|----|----|----|----|-----|--------|-----|----|-----|
|     |    |     | min. | max |    |     |    |    |    |    |     | n° x Ø |     |    | max |
| 114 | 70 | 114 | 15   | 24  | 40 | 66  | 38 | 49 | 20 | 69 | 52  | 3x5,5  | 110 | 10 | 0,3 |
| 140 | 76 | 140 | 20   | 32  | 50 | 80  | 40 | 53 | 21 | 74 | 65  | 3x6,5  | 135 | 11 | 0,3 |
| 166 | 80 | 166 | 25   | 50  | 65 | 100 | 40 | 60 | 26 | 86 | 87  | 4x6,5  | 160 | 11 | 0,4 |
| 195 | 85 | 195 | 30   | 68  | 90 | 130 | 40 | 57 | 28 | 85 | 105 | 6x6,5  | 195 | 12 | 0,4 |